

Алматы (7273)495-231

Ангарск (3955)60-70-56

Архангельск (8182)63-90-72

Астрахань (8512)99-46-04

Барнаул (3852)73-04-60

Белгород (4722)40-23-64

Благовещенск (4162)22-76-07

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Владикавказ (8672)28-90-48

Владимир (4922)49-43-18

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Иркутск (395)279-98-46

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Коломна (4966)23-41-49

Кострома (4942)77-07-48

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Курган (3522)50-90-47

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Ноябрьск (3496)41-32-12

Новосибирск (383)227-86-73

Киргизия (996)312-96-26-47

Омск (3812)21-46-40

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Петрозаводск (8142)55-98-37

Псков (8112)59-10-37

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Саранск (8342)22-96-24

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Севастополь (8692)22-31-93

Симферополь (3652)67-13-56

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Сургут (3462)77-98-35

Россия (495)268-04-70

Сыктывкар (8212)25-95-17

Тамбов (4752)50-40-97

Тверь (4822)63-31-35

Тольятти (8482)63-91-07

Томск (3822)98-41-53

Тула (4872)33-79-87

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Улан-Удэ (3012)59-97-51

Уфа (347)229-48-12

Хабаровск (4212)92-98-04

Чебоксары (8352)28-53-07

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Чита (3022)38-34-83

Якутск (4112)23-90-97

Ярославль (4852)69-52-93

Казахстан (772)734-952-31



sun | power VR L

Series OPzV/OPzV bloc

Valve regulated lead-acid
batteries for cyclic applications

sun | power VR L Series OPzV

Typical applications:

- Village power supplies
- Hybrid systems
- Peak Shaving/voltage stabilisation
- Stations of mobile communications
- Sustainable tourism
- Cathodic corrosion protection
- Pumping systems

Your benefits:

- Maintenance-free regarding water refilling – due to innovative Gel-technology
- Very high cycle stability during PSoC¹ operation – due to tubular plate design with efficient charge current acceptance
- Maximum compatibility – dimensions according to DIN 40742
- Optimal space utilization – due to possibility of horizontal arrangement²
- Higher short-circuit safety even during the installation – based on HOPPECKE system connectors

sun | power VR L Series OPzV bloc

Typical applications:


- Solar home storage systems
- Hybrid systems
- Signalling systems
- Street lighting
- Stations of mobile communications
- Medical care facilities
- Cathodic corrosion protection

Your benefits:

- Maintenance-free regarding water refilling – due to innovative Gel-technology
- Very high cycle stability during PSoC¹ operation – due to tubular plate design with efficient charge current acceptance
- Maximum compatibility – dimensions according to DIN 40744
- Easy assembly and installation – battery lid with integral handle
- Higher short-circuit safety even during the installation – based on HOPPECKE system connectors



Service life in cycles and Depth of Discharge

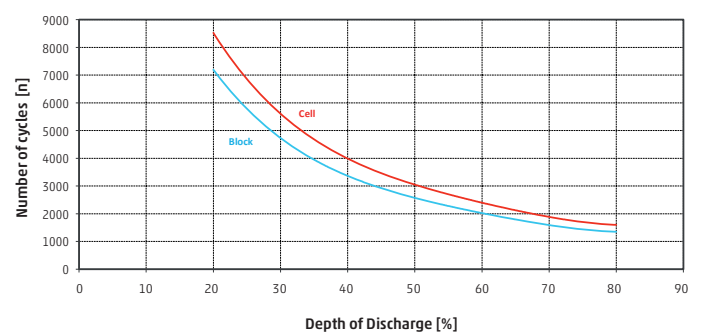

¹ Partial State of Charge ² Operating in a horizontal position is only possible with special variant. Please consider when ordering!

Capacities, dimensions and weights

| Series OPzV bloc | Nominal voltage V | C ₁₀₀ /1.85 V Ah | C ₅₀ /1.85 V Ah | C ₂₄ /1.83 V Ah | C ₁₀ /1.80 V Ah | C ₅ /1.77 V Ah | ca. Weight kg | max.* Length L mm | max.* Width W mm | max.* Height H mm | Fig. |
|------------------------|-------------------|-----------------------------|----------------------------|----------------------------|----------------------------|---------------------------|---------------|-------------------|------------------|-------------------|------|
| sun power VRL 12-70 | 12 | 70 | 65 | 58 | 57 | 51 | 40.0 | 272 | 205 | 383 | A |
| sun power VRL 12-120 | 12 | 130 | 125 | 118 | 114 | 101 | 52.5 | 272 | 205 | 383 | A |
| sun power VRL 12-180 | 12 | 200 | 190 | 175 | 171 | 152 | 75.5 | 380 | 205 | 383 | A |
| sun power VRL 6-250 | 6 | 270 | 250 | 235 | 228 | 202 | 51.0 | 272 | 205 | 383 | B |
| sun power VRL 6-300 | 6 | 330 | 315 | 293 | 285 | 253 | 66.0 | 380 | 205 | 383 | B |
| sun power VRL 6-370 | 6 | 400 | 375 | 350 | 342 | 304 | 73.0 | 380 | 205 | 383 | B |

| Series OPzV | Nominal voltage V | C ₁₀₀ /1.85 V Ah | C ₅₀ /1.85 V Ah | C ₂₄ /1.83 V Ah | C ₁₀ /1.80 V Ah | C ₅ /1.77 V Ah | ca. Weight kg | max.* Length L mm | max.* Width W mm | max.* Height H mm | Fig. |
|--------------------------|-------------------|-----------------------------|----------------------------|----------------------------|----------------------------|---------------------------|---------------|-------------------|------------------|-------------------|------|
| sun power VRL** 2-250 | 2 | 287 | 264 | 243 | 214 | 198 | 18.3 | 105 | 208 | 420 | C |
| sun power VRL** 2-310 | 2 | 359 | 329 | 304 | 267 | 248 | 22.3 | 126 | 208 | 420 | C |
| sun power VRL** 2-370 | 2 | 430 | 395 | 365 | 320 | 298 | 26.5 | 147 | 208 | 420 | C |
| sun power VRL** 2-420 | 2 | 478 | 453 | 428 | 412 | 364 | 29.9 | 126 | 208 | 535 | C |
| sun power VRL** 2-520 | 2 | 574 | 543 | 513 | 495 | 437 | 35.1 | 147 | 208 | 535 | C |
| sun power VRL** 2-620 | 2 | 670 | 634 | 599 | 577 | 510 | 42.1 | 168 | 208 | 535 | C |
| sun power VRL** 2-750 | 2 | 847 | 802 | 762 | 718 | 625 | 48.7 | 147 | 208 | 710 | C |
| sun power VRL** 2-875 | 2 | 990 | 935 | 888 | 838 | 729 | 61.3 | 215 | 193 | 710 | D |
| sun power VRL** 2-1000 | 2 | 1130 | 1070 | 1016 | 957 | 833 | 65.9 | 215 | 193 | 710 | D |
| sun power VRL** 2-1125 | 2 | 1271 | 1203 | 1143 | 1077 | 938 | 75.6 | 215 | 235 | 710 | D |
| sun power VRL** 2-1250 | 2 | 1412 | 1337 | 1270 | 1197 | 1042 | 80.5 | 215 | 235 | 710 | D |
| sun power VRL** 2-1375 | 2 | 1553 | 1471 | 1397 | 1316 | 1146 | 89.3 | 215 | 277 | 710 | D |
| sun power VRL** 2-1500 | 2 | 1695 | 1604 | 1524 | 1436 | 1250 | 94.6 | 215 | 277 | 710 | D |
| sun power VRL** 2-1700 | 2 | 1955 | 1870 | 1785 | 1570 | 1315 | 110.0 | 215 | 277 | 855 | D |
| sun power VRL** 2-2000 | 2 | 2281 | 2182 | 2082 | 1832 | 1534 | 136.5 | 215 | 400 | 815 | E |
| sun power VRL** 2-2300 | 2 | 2607 | 2493 | 2380 | 2093 | 1753 | 152.9 | 215 | 400 | 815 | E |
| sun power VRL** 2-2600 | 2 | 2933 | 2805 | 2677 | 2355 | 1973 | 173.0 | 215 | 490 | 815 | F |
| sun power VRL** 2-2900 | 2 | 3258 | 3117 | 2975 | 2617 | 2192 | 186.5 | 215 | 490 | 815 | F |
| sun power VRL** 2-3200 | 2 | 3584 | 3428 | 3272 | 2878 | 2411 | 214.7 | 215 | 580 | 815 | F |
| sun power VRL** 2-3500 | 2 | 3910 | 3740 | 3570 | 3140 | 2630 | 222.3 | 215 | 580 | 815 | F |

C₁₀ and C₁₀₀ = Capacity at 10 h and 100 h discharge

* according to DIN 40742 data to be understood as maximum values
** also for horizontal application usage

Fig. A Series OPzV bloc

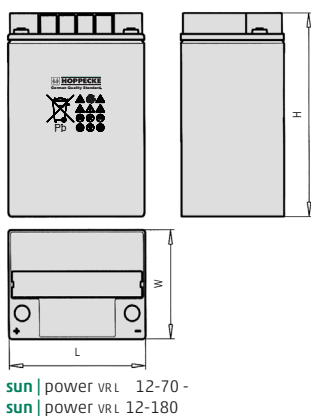


Fig. B Series OPzV bloc

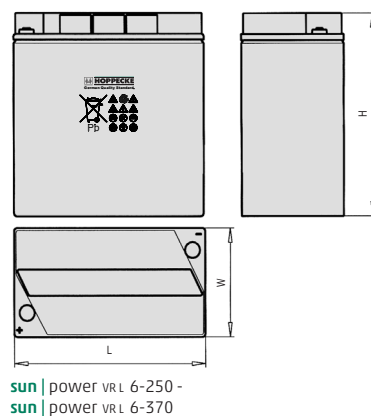


Fig. C Series OPzV




Fig. D Series OPzV




Fig. E Series OPzV





Fig. F Series OPzV

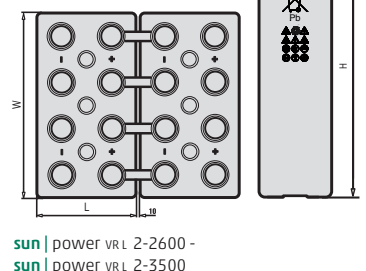

**Optimal environmental compatibility -
closed loop for recovery of materials in an accredited recycling system**
IEC 60896-21 · IEC 61427

Алматы (7273)495-231

Ангарск (3955)60-70-56

Архангельск (8182)63-90-72

Астрахань (8512)99-46-04

Барнаул (3852)73-04-60

Белгород (4722)40-23-64

Благовещенск (4162)22-76-07

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Владикавказ (8672)28-90-48

Владимир (4922)49-43-18

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Иркутск (395)279-98-46

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Коломна (4966)23-41-49

Кострома (4942)77-07-48

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Курган (3522)50-90-47

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Ноябрьск (3496)41-32-12

Новосибирск (383)227-86-73

Киргизия (996)312-96-26-47

Омск (3812)21-46-40

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Петрозаводск (8142)55-98-37

Псков (8112)59-10-37

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Саранск (8342)22-96-24

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Севастополь (8692)22-31-93

Симферополь (3652)67-13-56

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Сургут (3462)77-98-35

Россия (495)268-04-70

Сыктывкар (8212)25-95-17

Тамбов (4752)50-40-97

Тверь (4822)63-31-35

Тольятти (8482)63-91-07

Томск (3822)98-41-53

Тула (4872)33-79-87

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Улан-Удэ (3012)59-97-51

Уфа (347)229-48-12

Хабаровск (4212)92-98-04

Чебоксары (8352)28-53-07

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Чита (3022)38-34-83

Якутск (4112)23-90-97

Ярославль (4852)69-52-93

Казахстан (772)734-952-31